

Amphion Loudspeakers


Wall-Mount Bracket Assembly Instructions

IMPORTANT NOTES:


- ❗ Please first refer to the Ceiling/Wall-Mount Product Sheet for your monitor or speaker model here:

Pro-Audio "Create" Line <https://amphion.fi/create/support-pro-audio/product-information/>
Home Audio "Enjoy" Line <https://amphion.fi/enjoy/support-home-audio/product-information/>


- ❗ See your local Distributor or Dealer for specific information on Price | Parts | Installation
- ❗ This mount-system is a combination of an Amphion adaptor and a 3rd-Party ceiling/wall mount
- ❗ Amphion recommends that a professional installer or qualified tradesperson install this system
- ❗ This booklet is a general guide only. A technical sheet is available to Dealers/Distributors/Installers

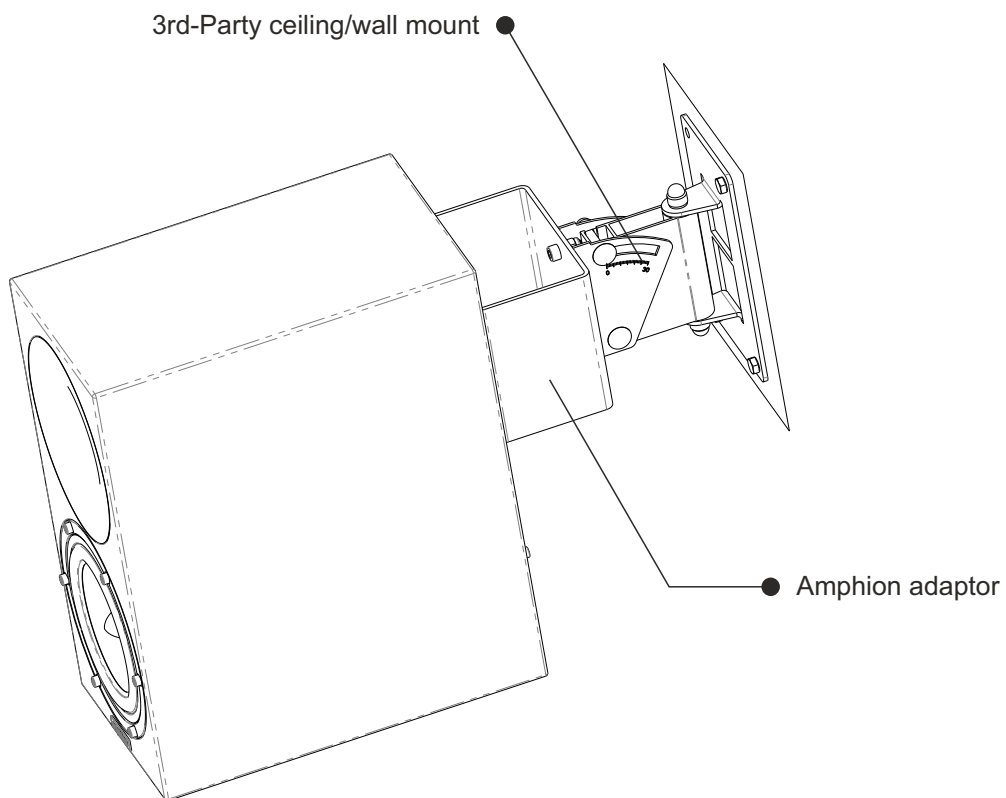



Components & Fasteners

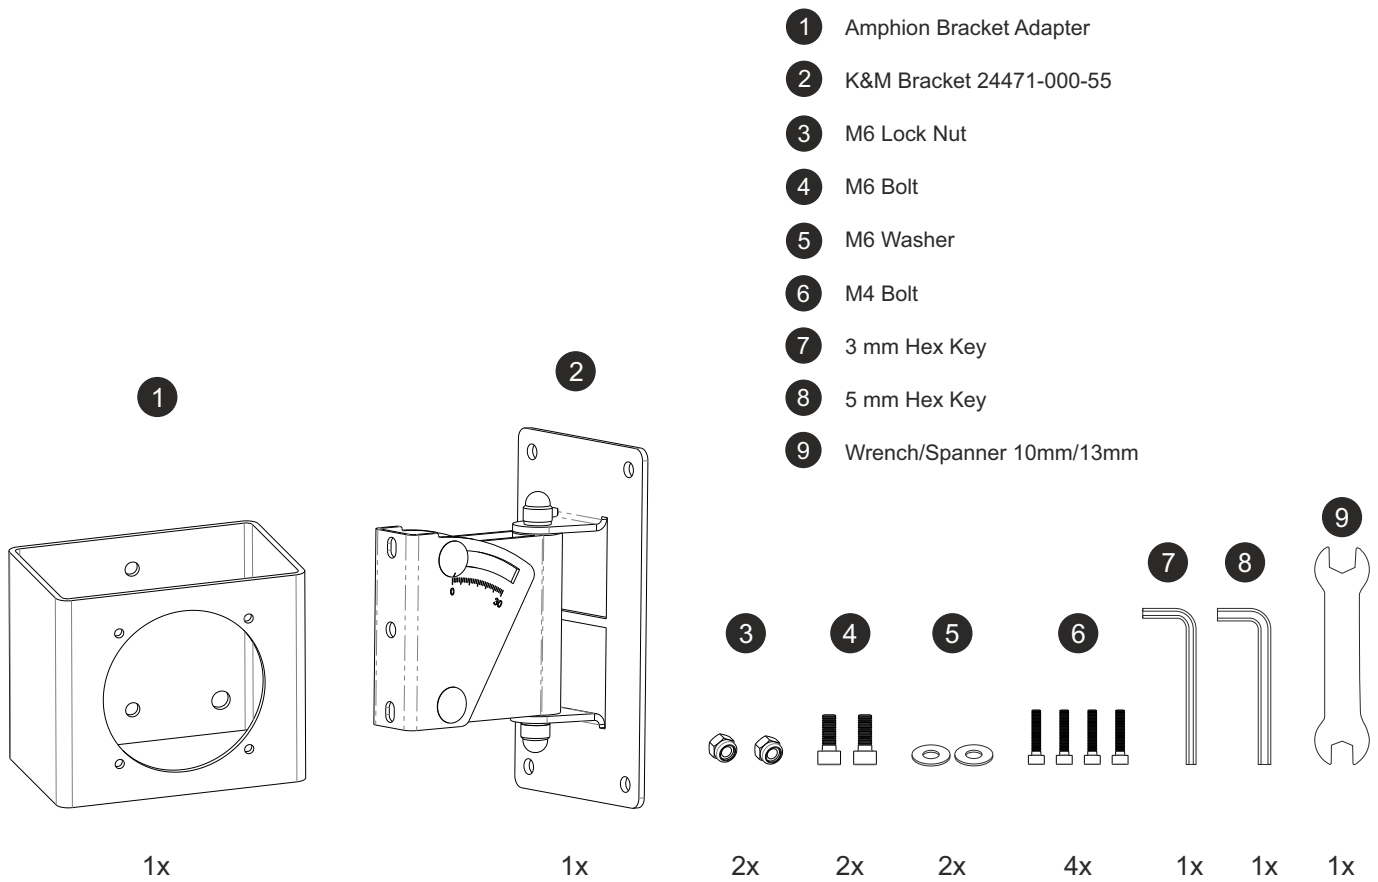



Amphion Adaptor & K&M Mount Dimensions (mm)

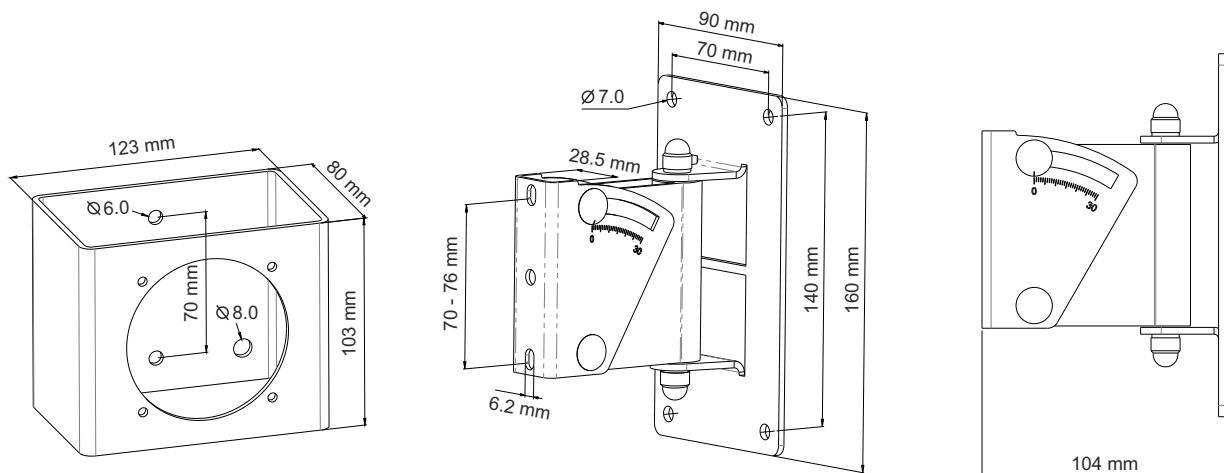


- ① Remove connection-post screws (4 screws)

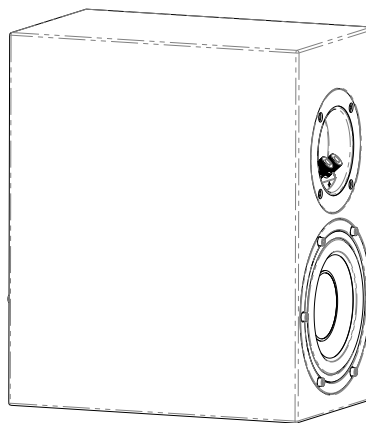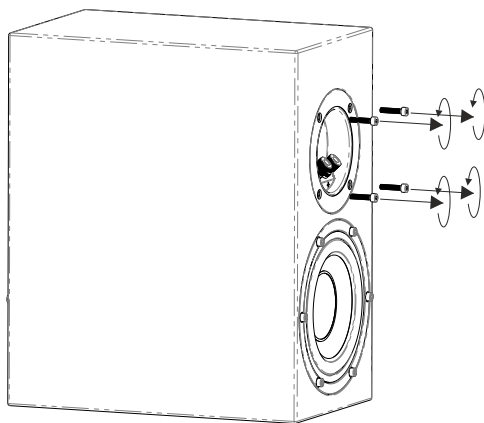


- ② Position adaptor bracket and affix (4 screws)

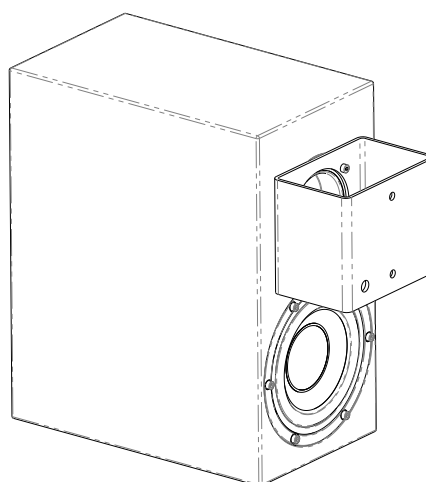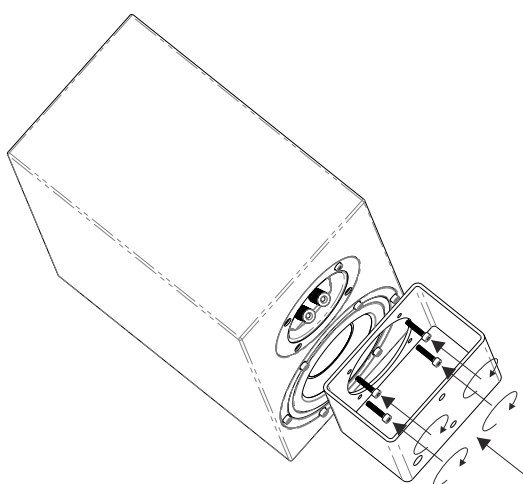


- ③ Affix wall-mount plate to wall using 4 x mounting bolts

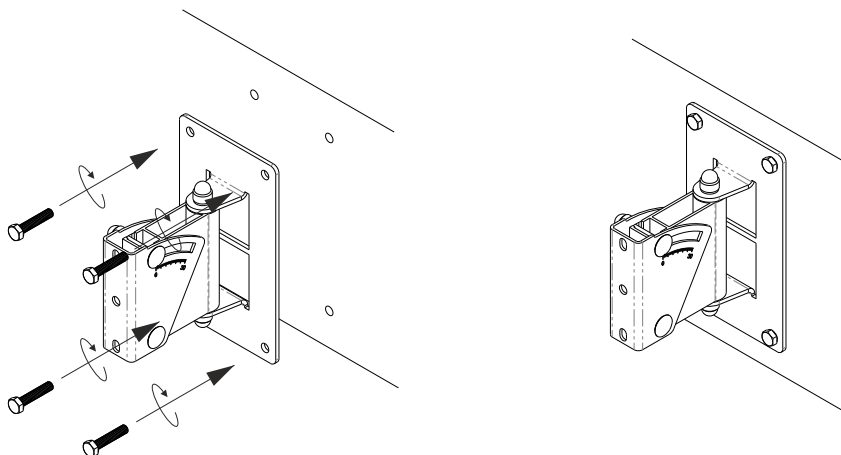


- ④ Remove adjustable U-bracket from wall-mount ie. bolts (2), washers (2), locknuts (2), and locknut cap (2)

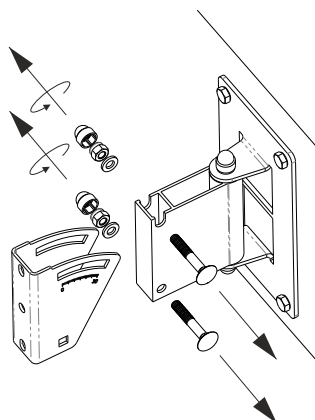


- ⑤ Attach adjustable U-bracket to speaker adaptor-bracket using bolts (2), washers (2), and locknuts (2)

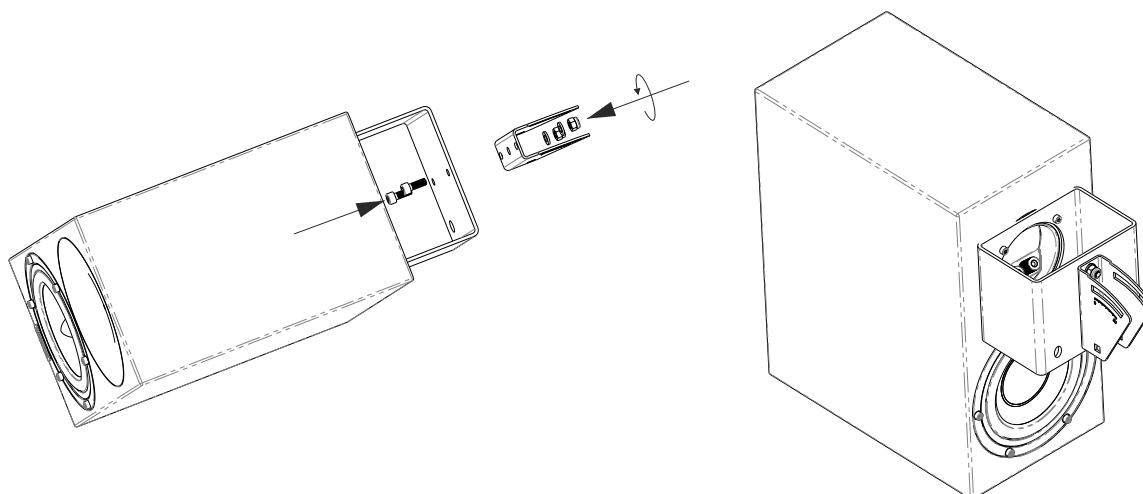


- ⑥ Slide speaker with mounting-assembly into place over wall-mount

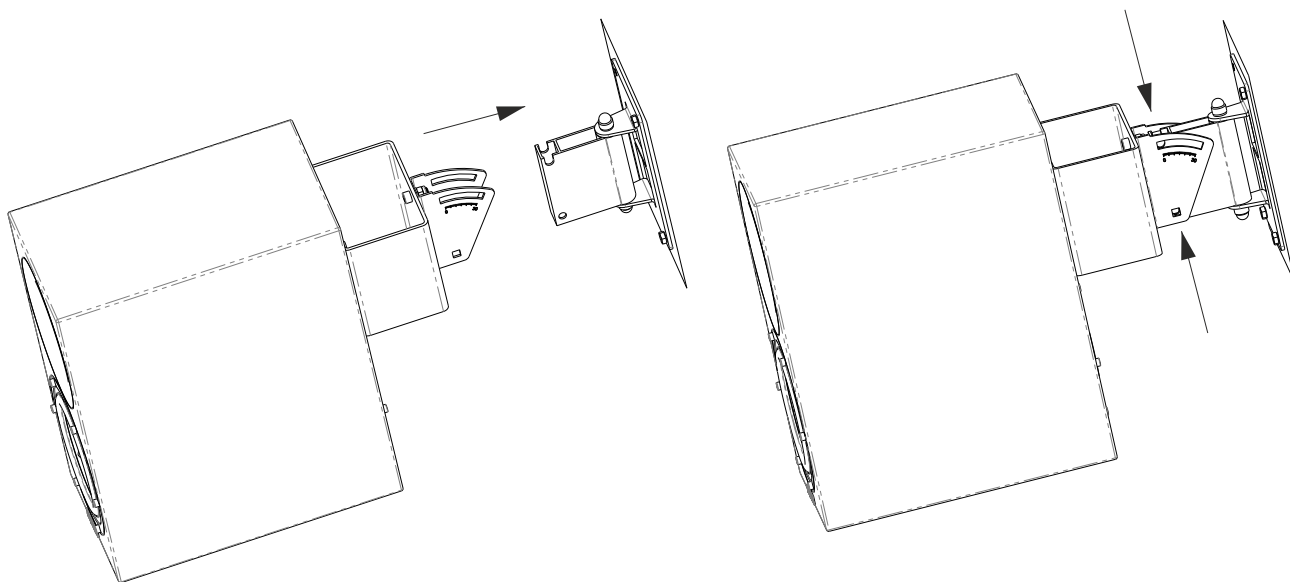


- ⑦ Insert bolts (2), washers (2), locknuts (2), and locknut caps (2) to fasten adjustable U-bracket to wall-mount

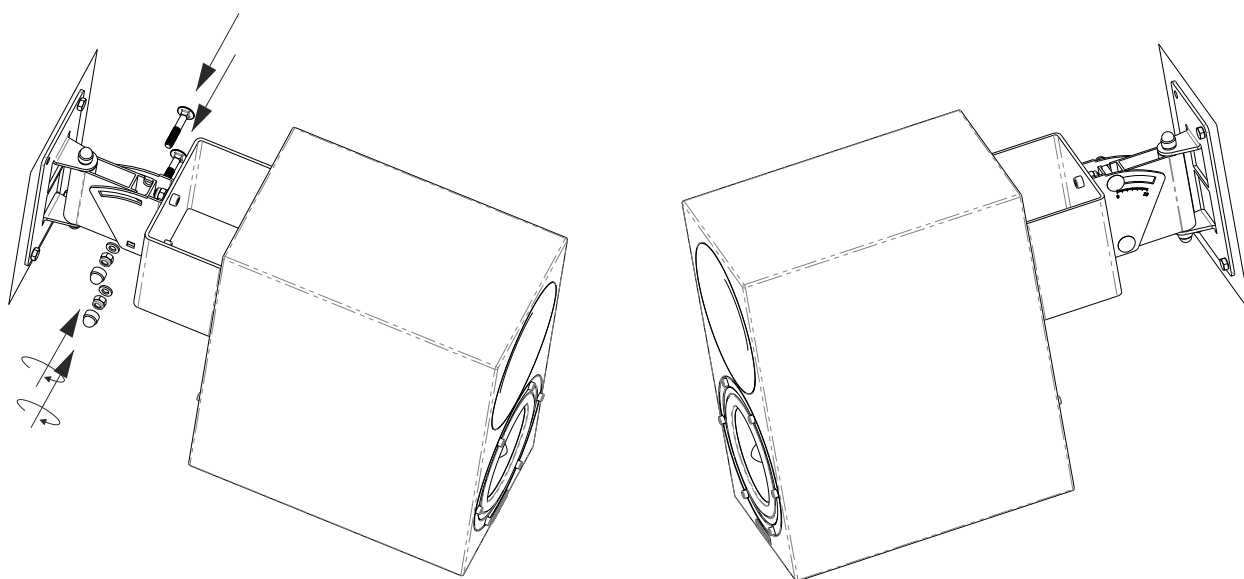

- ⑧ Set desired monitor tilt-angle (eg. 30 degrees pictured) and tighten adjustable hinge bolts

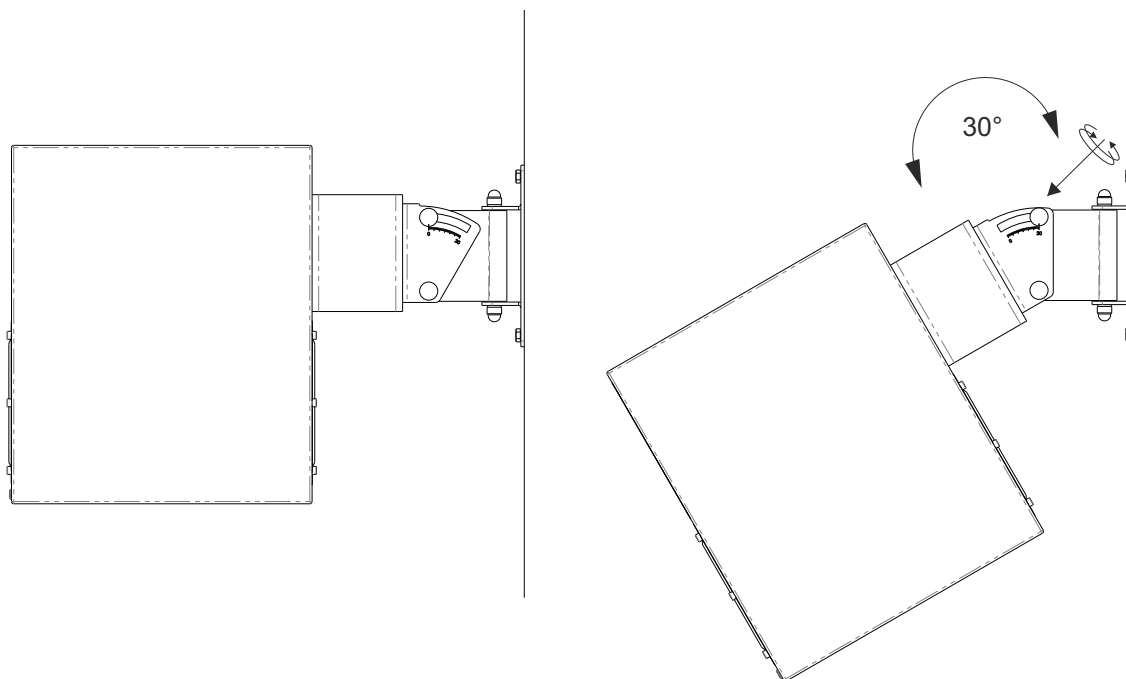

- ⑨ Adjust lateral monitor toe-in angle accordingly

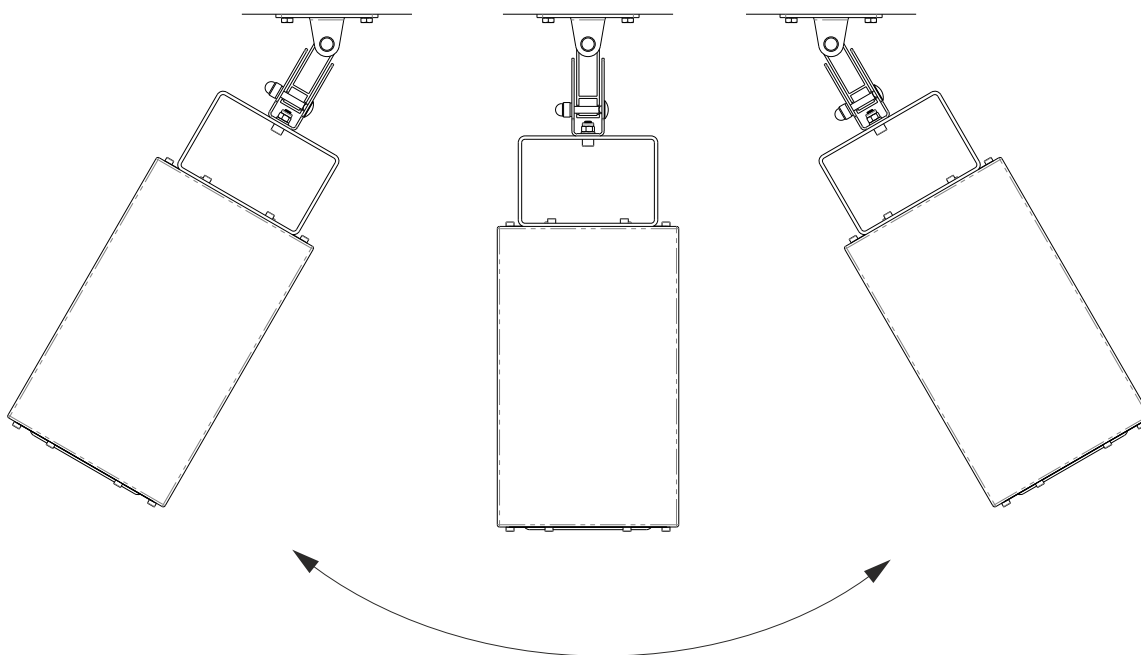



Assembly Instruction

Version: 1.1 / 01.12.2021

Amphion Loudspeakers Ltd.

Factory & Headquarters

Kiveläntie 4

70460 Kuopio

Finland

Tel. +358 17 2882 100

info@amphion.fi

amphion.fi